


ALNITEK Donut High Resilience Polyurethane on Aluminum Wheel

Wheel Model# DUSA



Features


- Superior low rolling resistance
- Non-marking, smooth and quiet operation
- Deflects debris and metal shavings
- Resists most solvents, oil, grease and water
- Shock absorption and impact resistance



Wheel Dia. (in.)	Tread Width (in.)	Hub Length* (in.)	Load Cap. (lbs.)	Part#	Bearing	^Color
4	2	2-7/16	800	420DUSA63^T	6203 Precision Ball	L, R, X
5	2	2-7/16	1000	520DUSA63^T	6203 Precision Ball	L, R, X
6	2	2-7/16	1200	620DUSA63^T	6203 Precision Ball	L, R, X
8	2	2-7/16	1500	820DUSA63^T	6203 Precision Ball	L, R, X

* Hub Length includes top hat bushings

^Color Code

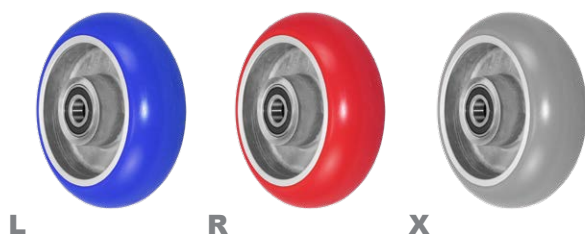

ALNITEK Flat High Resilience Polyurethane on Aluminum Wheel

Wheel Model# TUSA-EX



Waffle Core - W



Features

- Superior low rolling resistance
- Non-marking, smooth and quiet operation
- Deflects debris and metal shavings
- Resists most solvents, oil, grease and water
- Shock absorption and impact resistance



Wheel Dia. (in.)	Tread Width (in.)	Hub Length* (in.)	Load Cap. (lbs.)	Part#	Bearing
6	2	2-7/16	1300	620TUSA63LT-EX	6203 Precision Ball
8	2	2-7/16	1600	820TUSA64LT-EX-W	6204 Precision Ball

* Hub Length includes top hat bushings

