30 Series

1250 lbs
565 kg

2 4 5 6 8

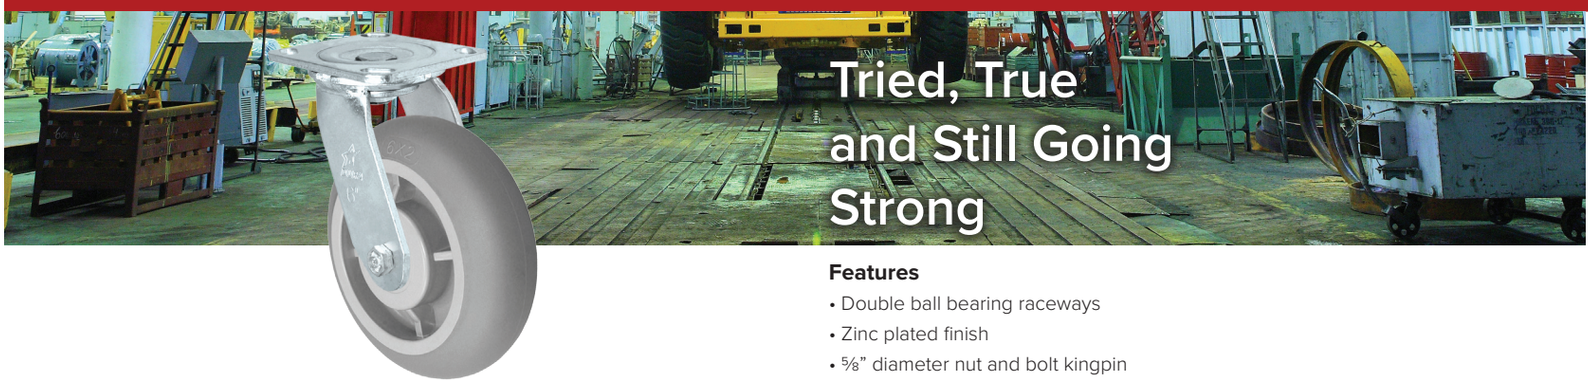

Features

- Double ball bearing raceways
- Zinc plated finish
- ⅝" diameter nut and bolt kingpin
- ¼" cold forged steel top plate & yoke legs

Medium-Heavy Duty Caster

Load Capacity
1250 lbs
565 kg

Industries and Applications

Food Service
Platform Trucks
Industrial
Commercial

Size	Bolt Pattern	Attaching Bolt Dia.	Plate
4 x 4-1/2	2-5/8 x 3-5/8 to 3 x 3	3/8	03

Caster Type	Part #
Swivel	***CS***
Rigid	***CR***
Swivel/Top Lock Brake	***TS***
Swivel/Cam Lock Brake	***MS***
Rigid/Top Lock Brake	***TR***

Options	Suffix
4 Position Lock	PSL

Bearing Options	Part #
Roller	23
Q34 Precision Ball	38
1/2 I.D. Delrin	56
3/4 I.D. Delrin	57
6203 Precision Ball	63
6204 Precision Ball	64

Wheel Dia.	Tread Wid.	Wheel Type	Load Cap.	OAH	Radius	Swivel Part #	**Bearing Options
4	2	Yoke only	1250	-	-	30***CS***420-03	-
4	2	Thermoplastic Rubber	300	5-5/8	3-1/4	30***CS***420TPR**-03	23, 38, 56, 57
4	2	Donut Thermoplastic Rubber	300	5-5/8	3-1/4	30***CS***420DPR**-03	23, 38, 56, 57
4	2	Elastic Rubber | Nylon	400	5-5/8	3-1/4	30***CS***420ERN**-03	23, 38, 56, 57
4	2	Rubber | Steel	400	5-5/8	3-1/4	30***CS***420RS**-03	23, 38, 56, 57
4	2	Rubber | Glass-filled Nylon	400	5-5/8	3-1/4	30***CS***420RN**-03	23, 38, 56, 57
4	2	Duratek High Tech Rubber	450	5-5/8	3-1/4	30***CS***420PPR**-03	23, 38, 56, 57
4	2	Duratek Donut High Tech Rubber	450	5-5/8	3-1/4	30***CS***420DTR**-03	23, 38, 56, 57
4	2	Polyurethane | Polyolefin	500	5-5/8	3-1/4	30***CS***420PPU**-03	23, 38, 56, 57
4	2	Duratough Polyurethane | Polyolefin	700	5-5/8	3-1/4	30***CS***420PTU**-03	23, 38, 56, 57
4	2	HD Polyolefin	700	5-5/8	3-1/4	30***CS***420HPO**-03	23, 38, 56, 57
4	2	Polyurethane | Steel	700	5-5/8	3-1/4	30***CS***420PU**-03	23, 38, 56, 57
4	2	Semi-Steel	700	5-5/8	3-1/4	30***CS***420SS**-03	23, 38, 56, 57
4	2	V-Groove	700	5-5/8	3-1/4	30***CS***420VG**-03	23, 38, 56, 57
4	2	Nylon	800	5-5/8	3-1/4	30***CS***420NY**-03	23, 38, 56, 57
4	2	Solid Polyurethane	800	5-5/8	3-1/4	30***CS***420SPU**-03	23, 38, 56, 57
4	2	Polyurethane | Glass-filled Nylon	800	5-5/8	3-1/4	30***CS***420MU**-03	23, 38, 56, 57
4	2	Glass-filled Nylon	800	5-5/8	3-1/4	30***CS***420MA**-03	23, 38, 56, 57
4	2	Phenolic	800	5-5/8	3-1/4	30***CS***420PH**-03	23, 38, 56, 57
4	2	Sirius HD Donut Polyurethane | Aluminum	1000	5-5/8	3-1/4	30***CS***420DUA**-03	63
4	2	HD Solid Polyurethane | Glass-filled Nylon	1200	5-5/8	3-1/4	30***CS***420HU**-03	23, 38, 56, 57, 63
4	2	Ductile Steel	1250	5-5/8	3-1/4	30***CS***420DS**-03	23, 38
5	2	Yoke Only	1250	-	-	30***CS***520-03	-
5	2	Thermoplastic Rubber	350	6-1/2	3-7/8	30***CS***520TPR**-03	23, 38, 56, 57
5	2	Donut Thermoplastic Rubber	350	6-1/2	3-7/8	30***CS***520DPR**-03	23, 38, 56, 57
5	2	Elastic Rubber | Nylon	450	6-1/2	3-7/8	30***CS***520ERN**-03	23, 38, 56, 57
5	2	Rubber | Steel	450	6-1/2	3-7/8	30***CS***520RS**-03	23, 38, 56, 57
5	2	Rubber | Glass-filled Nylon	450	6-1/2	3-7/8	30***CS***520RN**-03	23, 38, 56, 57
5	2	Duratek High Tech Rubber	500	6-1/2	3-7/8	30***CS***520PPR**-03	23, 38, 56, 57

Wheel Dia.	Tread Width	Wheel Type	Load Cap.	OAH	Radius	Swivel Part #	**Bearing Options
5	2	Duratek Donut High Tech Rubber	500	6-1/2	3-7/8	30**CS**520DTR**-03	23, 38, 56, 57
5	2	Polyurethane | Polyolefin	600	6-1/2	3-7/8	30**CS**520PPU**-03	23, 38, 56, 57
5	2	Duratough Polyurethane | Polyolefin	750	6-1/2	3-7/8	30**CS**520PTU**-03	23, 38, 56, 57
5	2	HD Polyolefin	900	6-1/2	3-7/8	30**CS**520HPO**-03	23, 38, 56, 57
5	2	Polyurethane | Steel	1000	6-1/2	3-7/8	30**CS**520PU**-03	23, 38, 56, 57
5	2	Semi-Steel	1000	6-1/2	3-7/8	30**CS**520SS**-03	23, 38, 56, 57
5	2	V-Groove	1000	6-1/2	3-7/8	30**CS**520VG**-03	23, 38, 56, 57
5	2	Nylon	1000	6-1/2	3-7/8	30**CS**520NY**-03	23, 38, 56, 57
5	2	Solid Polyurethane	1000	6-1/2	3-7/8	30**CS**520SPU**-03	23, 38, 56, 57
5	2	Polyurethane | Glass-filled Nylon	1000	6-1/2	3-7/8	30**CS**520MU**-03	23, 38, 56, 57
5	2	Glass-filled Nylon	1000	6-1/2	3-7/8	30**CS**520MA**-03	23, 38, 56, 57
5	2	Phenolic	1000	6-1/2	3-7/8	30**CS**520PH**-03	23, 38, 56, 57
5	2	Sirius HD Donut Polyurethane | Alumimum	1200	6-1/2	3-7/8	30**CS**520DUA**-03	63
5	2	HD Solid Polyurethane | Glass-filled Nylon	1250	6-1/2	3-7/8	30**CS**520HU**-03	23, 38, 56, 57, 63
5	2	Ductile Steel	1250	6-1/2	3-7/8	30**CS**520DS**-03	23, 38
6	2	Yoke Only	1250	-	-	30**CS**620-03	-
6	2	Thermoplastic Rubber	500	7-1/2	4-9/16	30**CS**620TPR**-03	23, 38, 56, 57
6	2	Donut Thermoplastic Rubber	500	7-1/2	4-9/16	30**CS**620DPR**-03	23, 38, 56, 57
6	2	Elastic Rubber | Nylon	550	7-1/2	4-9/16	30**CS**620ERN**-03	23, 38, 56, 57
6	2	Rubber | Steel	550	7-1/2	4-9/16	30**CS**620RS**-03	23, 38, 56, 57
6	2	Rubber | Glass-filled Nylon	550	7-1/2	4-9/16	30**CS**620RN**-03	23, 38, 56, 57
6	2	Duratek High Tech Rubber	600	7-1/2	4-9/16	30**CS**620PPR**-03	23, 38, 56, 57
6	2	Duratek Donut High Tech Rubber	600	7-1/2	4-9/16	30**CS**620DTR**-03	23, 38, 56, 57
6	2	Polyurethane | Polyolefin	720	7-1/2	4-9/16	30**CS**620PPU**-03	23, 38, 56, 57
6	2	Duratough Polyurethane | Polyolefin	900	7-1/2	4-9/16	30**CS**620PTU**-03	23, 38, 56, 57
6	2	HD Polyolefin	1000	7-1/2	4-9/16	30**CS**620HPO**-03	23, 38, 56, 57
6	2	Polyurethane | Steel	1200	7-1/2	4-9/16	30**CS**620PU**-03	23, 38, 56, 57
6	2	Semi-Steel	1200	7-1/2	4-9/16	30**CS**620SS**-03	23, 38, 56, 57
6	2	V-Groove	1200	7-1/2	4-9/16	30**CS**620VG**-03	23, 38, 56, 57
6	2	Nylon	1200	7-1/2	4-9/16	30**CS**620NY**-03	23, 38, 56, 57
6	2	Solid Polyurethane	1200	7-1/2	4-9/16	30**CS**620SPU**-03	23, 38, 56, 57
6	2	Polyurethane | Glass-filled Nylon	1200	7-1/2	4-9/16	30**CS**620MU**-03	23, 38, 56, 57
6	2	Glass-filled Nylon	1200	7-1/2	4-9/16	30**CS**620MA**-03	23, 38, 56, 57
6	2	Phenolic	1200	7-1/2	4-9/16	30**CS**620PH**-03	23, 38, 56, 57
6	2	Sirius HD Polyurethane | Aluminum	1250	7-1/2	4-9/16	30**CS**620TUA**-03	63
6	2	Sirius HD Donut Polyurethane | Aluminum	1250	7-1/2	4-9/16	30**CS**620DUA**-03	63
6	2	HD Solid Polyurethane | Glass-filled Nylon	1250	7-1/2	4-9/16	30**CS**620HU**-03	23, 38, 56, 57, 63
6	2	Ductile Steel	1250	7-1/2	4-9/16	30**CS**620DS**-03	23, 38
8	2	Yoke Only	1250	-	-	30**CS**820-03	-
8	2	Thermoplastic Rubber	600	9-1/2	6-1/8	30**CS**820TPR**-03	23, 38, 56, 57
8	2	Donut Thermoplastic Rubber	600	9-1/2	6-1/8	30**CS**820DPR**-03	23, 38, 56, 57
8	2	Elastic Rubber | Nylon	600	9-1/2	6-1/8	30**CS**820ERN**-03	23, 38, 56, 57
8	2	Rubber | Steel	600	9-1/2	6-1/8	30**CS**820RS**-03	23, 38, 56, 57
8	2	Rubber | Glass-filled Nylon	600	9-1/2	6-1/8	30**CS**820RN**-03	23, 38, 56, 57
8	2	Duratek High Tech Rubber	675	9-1/2	6-1/8	30**CS**820PPR**-03	23, 38, 56, 57
8	2	Duratek Donut High Tech Rubber	675	9-1/2	6-1/8	30**CS**820DTR**-03	23, 38, 56, 57
8	2	Polyurethane | Polyolefin	800	9-1/2	6-1/8	30**CS**820PPU**-03	23, 38, 56, 57
8	2	Duratough Polyurethane | Polyolefin	1000	9-1/2	6-1/8	30**CS**820PTU**-03	23, 38, 56, 57
8	2	HD Polyolefin	1200	9-1/2	6-1/8	30**CS**820HPO**-03	23, 38, 56, 57
8	2	Polyurethane | Steel	1250	9-1/2	6-1/8	30**CS**820PU**-03	23, 38, 56, 57
8	2	Semi-Steel	1250	9-1/2	6-1/8	30**CS**820SS**-03	23, 38, 56, 57
8	2	V-Groove	1250	9-1/2	6-1/8	30**CS**820VG**-03	23, 38, 56, 57
8	2	Nylon	1250	9-1/2	6-1/8	30**CS**820NY**-03	23, 38, 56, 57
8	2	Solid Polyurethane	1250	9-1/2	6-1/8	30**CS**820SPU**-03	23, 38, 56, 57
8	2	Polyurethane | Glass-filled Nylon	1250	9-1/2	6-1/8	30**CS**820MU**-03	23, 38, 56, 57
8	2	Glass-filled Nylon	1250	9-1/2	6-1/8	30**CS**820MA**-03	23, 38, 56, 57
8	2	Phenolic	1250	9-1/2	6-1/8	30**CS**820PH**-03	23, 38, 56, 57
8	2	Sirius HD Polyurethane | Aluminum	1250	9-1/2	6-1/8	30**CS**820TUA**-03	63, 64
8	2	Sirius HD Donut Polyurethane | Aluminum	1250	9-1/2	6-1/8	30**CS**820DUA**-03	63, 64
8	2	HD Solid Polyurethane | Glass-filled Nylon	1250	9-1/2	6-1/8	30**CS**820HU**-03	23, 38, 56, 57, 63
8	2	Ductile Steel	1250	9-1/2	6-1/8	30**CS**820DS**-03	23, 38