








S25 Stainless Series


400 lbs
180 kg
1/4
3
4
5





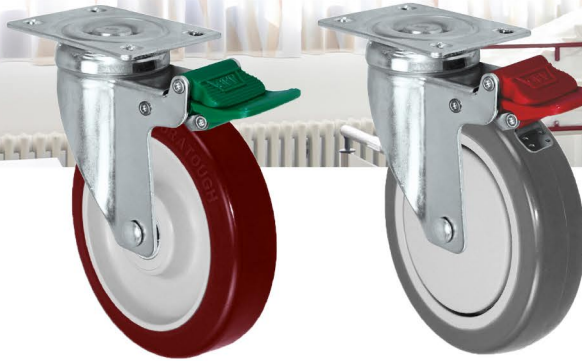


Elegance Meets Professional Mobility



The S25 Series has directional and total lock brake options, including a brake pedal for maximum maneuverability.



 **Light-Medium Duty Caster**



 **Load Capacity**
400 lbs
180 kg

Features

- Double ball bearing raceways
- Heavy gauge cold rolled #304 stainless steel
- Integrated dual pedal brake
- Safe, quiet and non-marking
- Plastic grease seal on swivel raceway

Industries and Applications

 Medical
  Laboratory

 Office
  Electronics



Size	Bolt Pattern	Attaching Bolt Dia.	**Plate
2-3/8 x 3-5/8	1-3/4 x 2-7/8 to 3	5/16	01

Size	Stem Type	**Stem
1/2-13 x 1	Threaded Stem	41
1/2-13 x 1-1/2	Threaded Stem	43
1/2-13 x 2-9/16	Threaded Stem	47

Caster Type	Lock #	Bearing Options	^Part #
Swivel	CS	Stainless Annular	S11
Rigid	CR	Precision Full Thread Guard	34
Swivel/Total Lock	TL	Precision Small Thread Guard	35
Swivel/Directional Lock	DL	1/2 Delrin	56
		1/2 Plain Bore with Bushing	83

Wheel Dia.	Tread Width	Wheel Type	Load Cap.	OAH	Radius	Swivel Part #	Bearing Options
3	1-1/4	Duratek High Tech Rubber	300	4-1/2	3	S25CS414PPR^.**	S11, 56
3	1-1/4	Duratek High Tech Conductive	300	4-1/2	3	S25CS414PPREC^.**	S11, 56
3	1-1/4	Polyurethane Polyolefin	300	4-1/2	3	S25CS414PPU^.**	34, 35
3	1-1/4	Duratough Polyurethane Polyolefin	325	4-1/2	3	S25CS414PTU^.**	S11, 56
3	1-1/4	Solid Polyurethane	400	4-1/2	3	S25CS414SPU^.**	83
4	1-1/4	Duratek High Tech Rubber	325	5-1/2	3-1/2	S25CS514PPR^.**	S11, 56
4	1-1/4	Duratek High Tech Conductive	325	5-1/2	3-1/2	S25CS514PPREC^.**	S11, 56
4	1-1/4	Polyurethane Polyolefin	325	5-1/2	3-1/2	S25CS514PPU^.**	34, 35
4	1-1/4	Duratough Polyurethane Polyolefin	350	5-1/2	3-1/2	S25CS514PTU^.**	S11, 56
4	1-1/4	Solid Polyurethane	400	5-1/2	3-1/2	S25S514SPU^.**	83
5	1-1/4	Duratek High Tech Rubber	325	6-1/2	4	S25CS514PPR^.**	S11, 56
5	1-1/4	Duratek High Tech Conductive	325	6-1/2	4	S25CS514PPREC^.**	S11, 56
5	1-1/4	Polyurethane Polyolefin	325	6-1/2	4	S25CS514PPU^.**	34, 35
5	1-1/4	Duratough Polyurethane Polyolefin	350	6-1/2	4	S25CS514PTU^.**	S11, 56
5	1-1/4	Solid Polyurethane	400	6-1/2	4	S25CS514SPU^.**	83